

200 Series

Swivel Joints




• Operating Condition

- Size Range : 15A~40A (1/2"~1 1/2")
- Max. Pressure : 23kgf/cm² (330PSI)
- Max. Rotation Speed : 10RPM
- Max. Temperature : 220°C (430°F)
- Media : Steam, Hot Oil, Water


• Features

- Spherical Seal Type
- Auto adjustment for Shaft angle
- Switchable between Heating & Cooling water
- Designed to Hot press for Tire mold


FTKJ200 (Knuckle Joint)



Type B



Type C

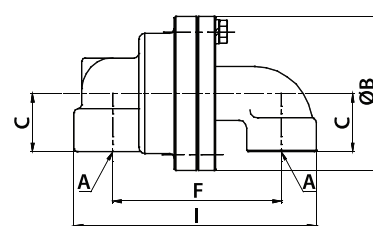

Type D

[unit : mm]

Nominal Size	A (PT)	B	C	D	E	F	G	H	I	Weight(kg)		
										Type B	Type C	Type D
15A	1/2"	70	30	84	82	75	100	98	107	1.0	1.0	1.1
20A	3/4"	85	30	97	93	92	116	111	130	1.6	1.6	1.8
25A	1"	100	38	110	120	110	135	143	157	2.5	2.6	2.8
32A	1-1/4"	118	45	131	145	140	159	173	196	3.9	4.0	4.2
40A	1-1/2"	126	55	140	150	145	170	180	208	5.0	4.9	5.2