


610 Series

Swivel Joints



FTKJ610

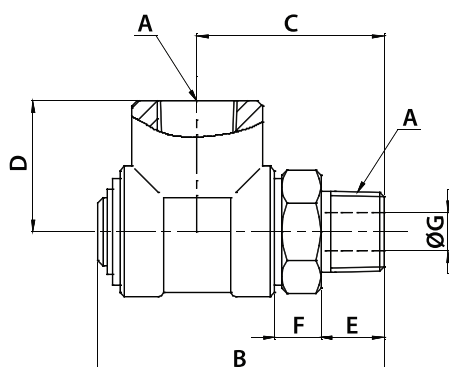


Operating Condition

- Size Range : 8A~50A (1/4"~2")
- Max. Pressure : 210kgf/cm² (3,000PSI)
- Max. Temperature : 100°C (210°F) NBR Packing
180°C (360°F) Viton Packing
- Media : Air, Oil, Water, Hydraulic Oil

Features

- Pressure Balance Type
- Low Torque at High Pressure
- Extended service life




[unit : mm]

Nominal Size	A (PT)	B	C	D	E	F	G	H	Weight(kg) Type C
8A	1/4"	54.5	36	23	12	9.5	6	19	0.1
10A	3/8"	59	38.5	27	13	9.5	8	22	0.2
15A	1/2"	74.5	49.5	29	17	13	12	27	0.4
20A	3/4"	91	60	34	20	14.5	16	30	0.5
25A	1"	106	71	38.5	23	19	20	41	0.9
32A	1-1/4"	121	79	44	25	20	28	50	1.4
40A	1-1/2"	132	86	54	25	23	34	60	2.0
50A	2"	161	104	60	30	26	42	70	3.1

700 Series

Swivel Joints

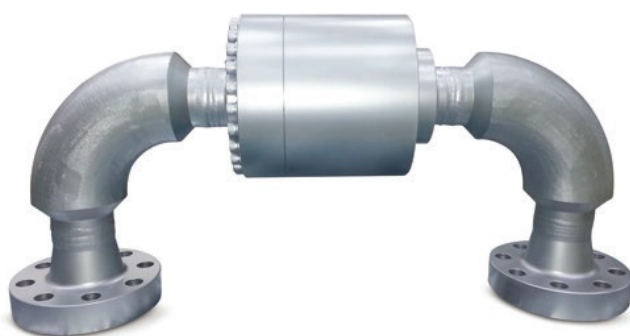

Operating Condition

- Size Range : 50A~150A (2"~6")
- Max. Pressure : 1,100kgf/cm² (3,000PSI)
- Max. Temperature : 100°C (210°F)
- Media : Water, Oil, Gas

Features

- Drilling Ship
- Long Sweep elbow
- DNA Product Certificate