


6000 Series Rotary Joints


FTKR6414-15 / FTKR6413-15



FTKR6414-15-A FTKR6413-15-A

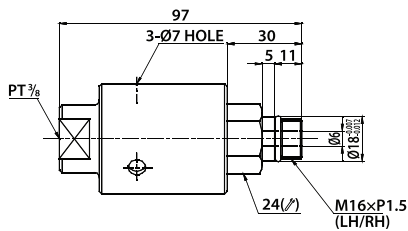

FTKR6414-15-R FTKR6413-15-R

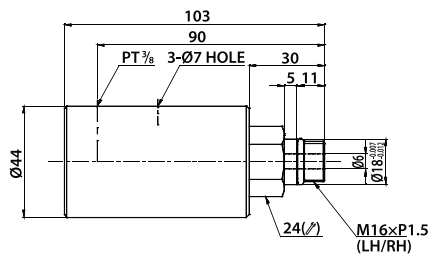

Operating Condition

- Max. Coolant Pressure : 105kgf/cm² (1,520PSI)
- Max. Rotation Speed : 15,000RPM
- Max. Temperature : 80°C (180°F)
- Media : Coolant, Hydraulic Oil
- Refer to graph for maximum pressure and speed combination

* Avoid max. pressure at max. rpm operation



Features

- For high speed Spindle & gundrill
- Other port size and connection unions are available on other demand

FTKR6505-15A×3P



Operating Condition

- Max. Air Pressure : 10kgf/cm² (150PSI)
- Max. Rotation Speed : 1,000RPM
- Max. Temperature : 100°C (210°F)
- Media : Air
- * Avoid max. pressure at max. rpm operation

Features

- For Tire Mold & Press Clutch
- Low Friction at High speed rotation by Mechanical Seal structure

