


Accessories


Journal Flange

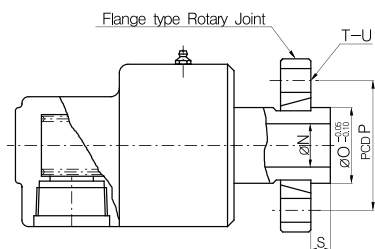

• #1000 / #2000 / #3000 / #3200 / #3700

Nominal Size		N	O	P	S	T	U	Z
15A	1/2"	14	25	45	8	4	M8	12
20A	3/4"	18	30	54	8	4	M10	16
25A	1"	23	35	60	9	4	M10	16
40A	1-1/2"	34	50	75	9	4	M10	16
50A	2"	48	65	95	10	4	M12	19
65A	2-1/2"	60	80	110	12	4	M12	19
80A	3"	70	90	125	12	6	M12	19

[unit : mm]



- #4000

Nominal Size		N	O	P	S	T	U	Z
50A	2"	45	59.5	100	25	4	M12	19
65A	2-1/2"	57	75.5	120	25	4	M12	19
80A	3"	72	87.5	145	25	4	M16	19
90A	3-1/2"	83	100	150	25	4	M16	19
100A	4"	93	113	170	30	6	M16	25
125A	5"	118	138	200	30	6	M18	25
150A	6"	145	170	240	35	12	M18	30

[unit : mm]

Syphon Hose




- **Features**

- Fixed Style Syphon
- Recommended for less than Ø500 sized diameter of the roll.

* When you order syphon hose.



Please inform us of the length of horizontal pipe and inner diameter of the roll.



[unit : mm]

Nominal Size		A (PF)	B	H
6A	1/8"	1/8	19	D 2 -20~30
8A	1/4"	1/4	19	
10A	3/8"	3/8	22	
15A	1/2"	1/2	28	
20A	3/4"	3/4	38	

Syphon Elbow




[unit : mm]

Nominal Size		A (PF)	A° (PT)	B	C	D	E	F	Net Wt.kg
10A	3/8"	3/8"	3/8"	37	60	40	30	37	0.5
15A	1/2"	1/2"	1/2"	37	60	40	30	37	0.5
20A	3/4"	3/4"	3/4"	45	70	50	36	46	0.8
25A	1"	1"	1"	50	85	60	42	51	1.0
32A	1-1/4"	1-1/4"	1-1/4"	62	95	70	52	63	1.8
40A	1-1/2"	1-1/2"	1-1/2"	70	105	80	60	71	2.3

- **Features**

- Pin connection between Horizontal & Vertical pipes allows free bending
- Spherical Seal face & Teflon Sealing
- Fixed type Syphon Elbow is recommended for over Ø500 sized rolls.
- Please Operate under 200RPM for Roll 60" in paper industry

Rotary Syphon Scoop (RS-ST)



- **Operating Condition**

- Speed : 200~600m/min

- **Features**

- Rotating Syphon for Paper Dryer
- Shell & Scoop Distance = 1.6mm
- Thin Rimming Thickness for higher heat transfer rate.