


6000 Series Rotary Joints


FTKR6314-12 / FTKR6313-12



FTKR6314-12-A FTKR6313-12-A

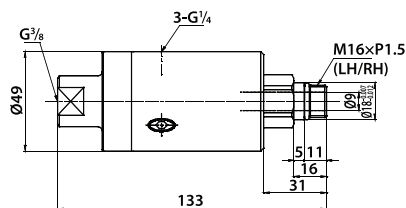


FTKR6314-12-R FTKR6313-12-R

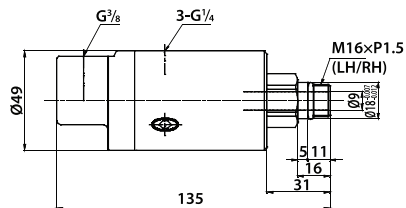

Operating Condition

- Max. Coolant Pressure : 70kgf/cm² (1,000PSI)
- Max. Rotation Speed : 12,000RPM
- Max. Temperature : 80°C (180°F)
- Media : Coolant, Hydraulic Oil
- Refer to graph for maximum pressure and speed combination

* Avoid max. pressure at max. rpm operation

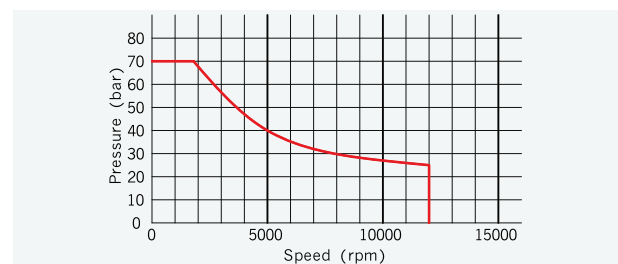


Features

- For high speed machining centers at an economical price
- Dry Running at high speed without coolant pressure
- Other port size and connection unions are available on other demand


FTKR6314-20 / FTKR6313-20



FTKR6314-20-A FTKR6313-20-A

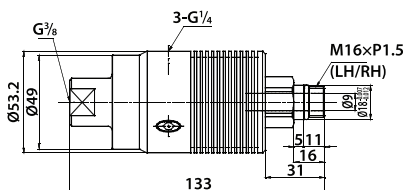


FTKR6314-20-R FTKR6313-20-R

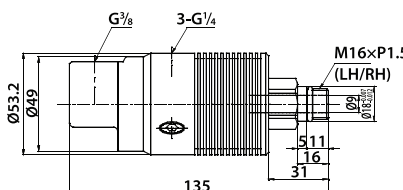

Operating Condition

- Max. Coolant Pressure : 105kgf/cm² (1,520PSI)
 - Max. Rotation Speed : 20,000RPM
 - Max. Temperature : 80°C (180°F)
 - Media : Coolant, Hydraulic Oil
 - Refer to graph for maximum pressure and speed combination
- * Avoid max. pressure at max. rpm operation

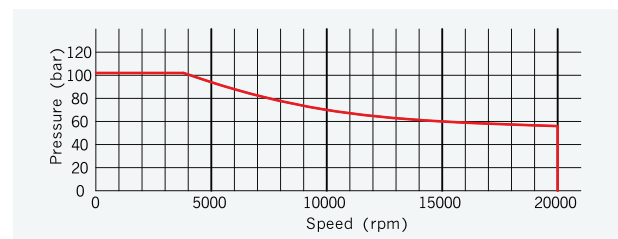

Features

- For high speed machining centers
- Dry Running at high speed without coolant pressure
- Other port size and connection unions are available on other demand